



MAXPRO

TORQUE EQUIPMENT & CALIBRATION SERVICES

Sales • Calibrations • Repair • Rentals



215-293-0800 or 1-888-315-0175 • www.maxprocorp.com



B-RAD Select

The B-RAD Select brushless battery torque wrench is the industry standard in heavy duty battery torque wrenches. Features include auto back-off along with 10 ft. lbs. / NM digital display setting points, and +/- 5% accuracy.

Range: 40-5,000 ft. lbs



B-RAD S

The B-RAD S, which stands for "strain gauge" technology, is equipped with a built-in transducer that offers real-time torque measurements for on-the-spot accuracy.

Range: 50-5,000 ft. lbs.



B-RAD X

The latest generation of our popular battery tool series, the B-RAD X is raising the bar for torque range capacity with a battery tool, maxing out at an impressive 11,000 ft. lbs./15,000 Nm.

Range: 5,000 - 11,000 ft. lbs.



Torsion X Pump

Extreme duty, 10,000 PSI hydraulic torque wrench pump. Operates all hydraulic torque wrenches. Built in manifold, to run up to 2 wrenches at once.

Available in air or electric styles.



Torsion X Low Profile

No other high capacity torque product is available on the market that provides as much torque output with such a limited height tool.

Range: 100-30,000 ft. lbs.



Torsion X Square Drive

Any industrial impact socket can be used with these wrenches enabling them to be the go to choice for millwrights, maintenance and mechanical workers.

Range: 200-50,000 ft. lbs.



B-RAD Offset

B-RAD Select Offset offers more flexibility for those tight spaces. With higher speed and long battery life the B-RAD Select Offset incorporates a new torque display with buttons.

Range: 130–5,000 ft. lbs.



E-RAD

Most accurate high-capacity electric torque tool on the market. Accurate to $\pm 2.8\%$ with settings in either ft. lbs. or NM. Features include: Data downloading, auto back-off, and ultra quiet operation.

Range: 100–13,000 ft. lbs.



Pneumatic

This stall-type tool eliminates destructive hammering with their continuous flow of controlled torque. They are available in both Standard (ft/lbs) and Metric (Nm) models.

Range: 50–11,000 ft. lbs.




HiForce Jacks, Rams, & Pumps

A wide variety of ramps and pumps are available for any lifting/ jacking application up to 500 Tons. Used in a wide variety of heavy industrial applications in heavy equipment, quarries, power generation, and petrochemical industries.



HiForce Nutsplitters

This Hydraulic Nut Splitter cuts through the hardest bolts. Save time with fast nut removal. Save money with less downtime and safer cutting.

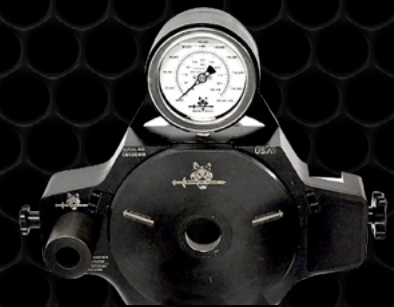

Norwolf Calibre™

The Calibre bolt tension calibrator is used for all bolts with the following tools:

Impact wrenches, manual torque wrenches, electric, battery pneumatic, and hydraulic torque wrenches. Can also be used with DTI squirters, and TC break off style bolts.



Mobile Calibration

Maxpro's mobile calibration van is equipped to perform on-site calibrations of your torque equipment up to 25,000 ft.lbs. and pressure equipment up to 10,000 PSI. Holding the same ISO/IEC 17025 accreditation and calibration capabilities as our in-house calibration laboratory.



Rentals

Maxpro has one of the largest fleets of pneumatic and hydraulic bolting and tensioning equipment in the Northeast. We are proud to offer our customers Project Rental Packages of any size they require. All our bolting equipment is calibrated to meet the ISO/IEC 17025 standards and is thoroughly inspected before every rental.